

①

**National Gallery of Modern Art
Government of India
Jaipur House, New Delhi-110003.**

File No. F. 150002/2014/NGMA

Dated: May 20th, 2014

NOTICE INVITING QUOTATIONS

The Director, National Gallery of Modern Art (NGMA), New Delhi invites quotation for supply and installation of furniture and workstation etc.

- (1) The intending tenderers must produce copies of registration under DVAT Act 2004 and furnish their TIN number along with the bids.
- (2) The tenderer should have a local office in Delhi and should be fully equipped to provide after sales service for the same.
- (3) The successful tenderer should have to supply, at site with cartage.
- (4) **Warranty:** The equipments supplies shall carry on-site warranty period of at-least 2 years from the date of supply.
- (5) Earnest Money Deposit (EMD) of Rs. 20,000.00 (Rupees: Twenty Thousand only) is to be deposited by Demand Draft/Pay Order drawn in the name of "Drawing & Disbursing Officer, National Gallery of Modern Art", payable at New Delhi should be submitted along with the Tender. Earnest Money Deposit shall be returned to unsuccessful tenderers.
- (6) The successful bidder shall have to supply, Installation the furniture within 15 days from the date of the supply orders.
- (7) Copies of tender forms can be obtained from the Administrative Officer, National Gallery of Modern Art, Jaipur House, New Delhi, at the cost of Rs. 500/- can be seen from Central Purchase Portal (<http://eprocure.gov.in>) and NGMA website www.ngmaindia.gov.in.
- (8) The quotations in sealed covers will be received up-to 27th May, 2014 at 2:00 p.m. uploading and thereafter bids are liable to be rejected.
- (9) Quotations should be valid at-least for six months.
- (10) The Director (NGMA) reserves the right to accept the tenders in totality or in parts thereof. The Director (NGMA) also reserves the right to accept or reject the tenders without assigning any reasons.

Encl: Terms & Conditions (Annexure-'A')
Specification (Annexure-'B')


(S.K. Misra)
Administrative Officer
(SHAIENDRA KUMAR MISRA)
Administrative Officer & Head of Office
National Gallery of Modern Art
Government of India
Jaipur House, India Gate,
New Delhi-110003

NATIONAL GALLERY OF MODERN ART
Jaipur House, New Delhi-110003

**GENERAL TERMS AND CONDITIONS FOR THE WORK OF SUPPLY, INSTALLATION
OF THE FURNITURE AND WORKSTATION ETC., AT NGMA, NEW DELHI**

1. The Tenderer shall be required to take up the work of Supply, Installation of the furniture and workstation etc., at NGMA, New Delhi.

2. Price:

The rates quoted/indicated shall include cost of materials and installation required for the work as per the enclosed specification and their supply & installation charges etc. The V.A.T./C.S.T./Service Tax and other taxes/ levies to be imposed on the rate shall be clearly mentioned. Rate quoted shall be firm and fixed for the entire period of execution of the Work Order and no escalation of rate on any ground whatsoever shall be applicable.

3. Time of completion:

Time is the essence of this contract. The time for supply, installation, testing and commissioning of aforesaid equipment is **15 days** from date of placement of work order. Order is liable to be cancelled if the aforesaid time schedule is not strictly followed, NGMA shall be entitled to claim appropriate liquidated damages in such a case. The decision of NGMA in this regard shall be final and binding on the successful tenderer.

4. Payment Terms

No advance payment shall be made by NGMA under any circumstances. Payment shall be released after satisfactory completion of the entire work within 15 (fifteen) days from the date of receipt of Invoice/Bill duly supported by receipted challan and satisfactory inspection/work completion certificate issued by the competent authority of NGMA.

5. T.D.S. shall be deducted at source, if applicable, from the bill of firm as per prevailing Government Rules.

6. Defect Liability Period


The Defect Liability /Warranty period shall be **2 years** from the date of completion of supply and installation. The successful tenderer (s) shall be responsible for all defects of the equipments, manufacturing defects etc. for a period of 2 years from the date of completion of the supply and installation. The successful tenderer (s) shall rectify / replace the defect/defective parts within the specified time without any costs whatsoever upto the complete satisfaction of the competent authority of NGMA.

7. Bad quality furniture/material will not be accepted and if found at any stage/ time, shall be liable to be rejected and should be replaced by the successful tenderer (s) at his cost as per specifications and directions given by the authorized representatives of NGMA.

8. Specification of the items under tender are enclosed for guidance. However, if any, ambiguity in the specification is detected, it shall be promptly brought to the notice of NGMA for clarification. The successful tenderer (s) without written approval of NGMA shall make no deviation from the approved specifications.
9. The NGMA does not bind itself to accept the lowest tender, and reserves the right to accept or reject any or all tenders wholly or partially without assigning any reason whatsoever.
10. The successful tenderer (s) shall obtain necessary trade and other licenses as may be required to carry out the tendered job and shall also be responsible for compliance of all rules and regulations which may be in force from time to time by the appropriate authority at his/their own cost.
11. Authorization letter from the original equipment manufacturer should be made available for quoting for their product, technical compliance to specification and for providing after sales support.
12. Address/contact number of the service centre available in New Delhi should be mentioned.
13. The warranty card to be duly signed by the manufacturer.
14. The warranty should be comprehensive and will start from the date of installation of the complete system.
15. Upgradation if any at the time of supply should be indicated and latest upgradation model to be supplied. However, the latest upgrade should comply with all the specifications mentioned in the tender.
16. The tenderer should quote for the original furniture only. Refurnished/re-manufactured items are not acceptable. The supplier has to provide documentary evidence by a certificate issued by the manufacturer stating the serial number and other details of the items with the manufacturing date etc., in order to ascertain genuine-ness of the products installed.
17. The successful tenderer has to submit sample for each tendered item for approval of competent authority.
18. The tenderers should be having experience of Ten years or more in the field of interior designing/ installation of complete system of office furniture in Government Sector or similar organization. Supporting documents in this regard may be enclosed with the bids.

-4-

LAYOUT

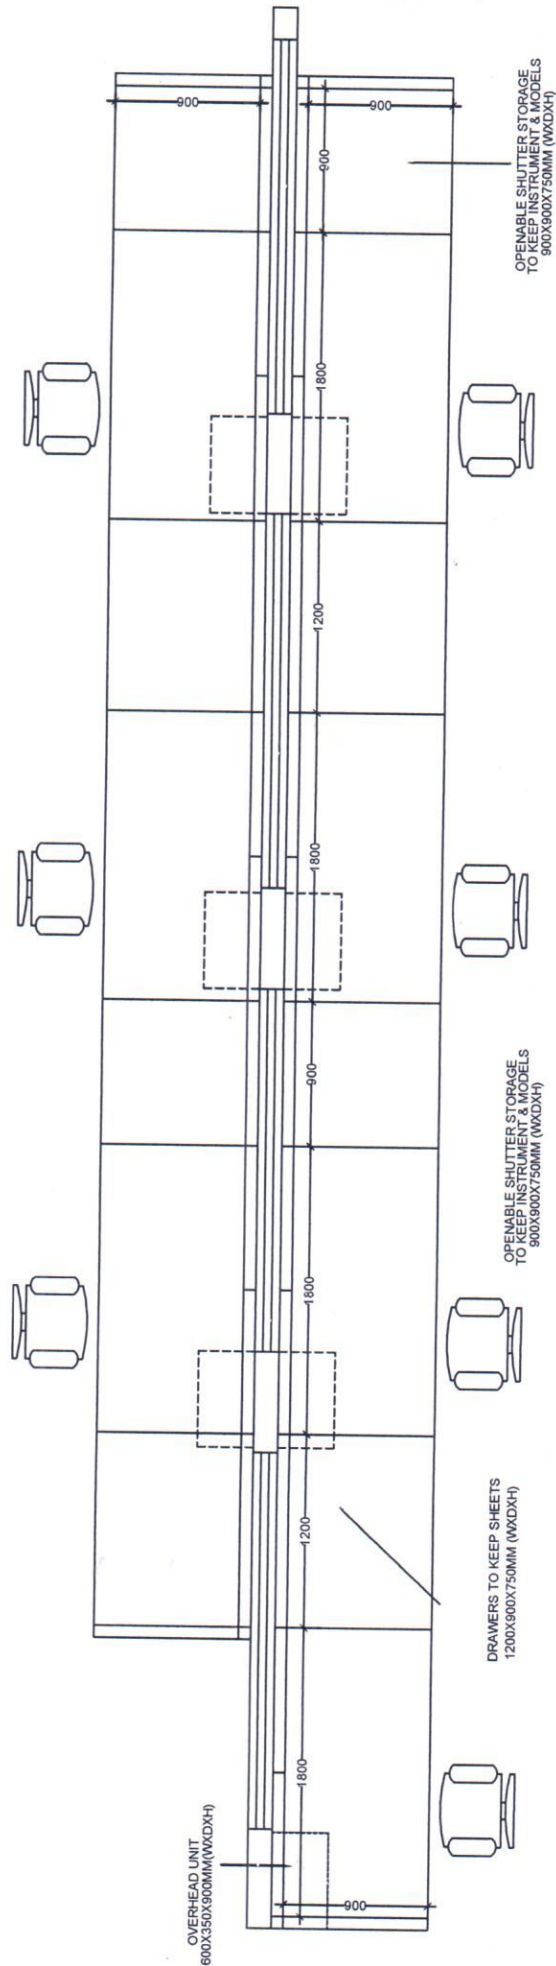

PROJECT TITLE:
NATIONAL GALLERY OF MODERN
ART, JAIPUR HOUSE
LAB 1 & 2

PRODUCT DETAIL:

WORKTOP 25MM PLB

OVERHEAD UNIT
OF HT 900MM

PARTITION HT900MM
& THICKNESS 72MM

SUMMARY :

1. WORKSTATION OF SIZE
1800X900X1200MM-7Nos.
2. DRAWERS OF SIZE
1100X900X750MM-4Nos.
3. STORAGE OF SIZE
900X900X750MM-4Nos.

SCALE: 1:100 DATE: 16/10/13

DRAWN BY: MD SAJID KHAN CHECKED BY: DEEPA SINGH

DRAWING NO: 218A

REVISION :

SR. NO.	DATE
1.	16-10-13

COMPANY:

DRURY DESIGN & CONSTRUCTION PVT. LTD.
40, 1ST FLOOR, RAJENDRA NAGAR
NEW DELHI - 110015

(LAYOUT)



COMPANY:
DUBLITE MIDDLEBURY MANUFACTURING INDUSTRIES, INC.
40 W. 107th Avenue, Suite 2000, Middleburg Heights, OH 44130
www.dublite.com



SPECIFICATION

S.No	Description
	<u>Restoror Room</u> <u>Full Ht cabin-1No.</u>
1	Designer Table of size 2100x900x750mm (wxdxh) with side unit of size 1200x450x750mm (wxdxh). Table made up of 19mm commercial board with 1mm laminate of standard and approved shade. Base made of 19mm commercial board with 1mm laminate of standard and approved shade. Teak moulding is provided at the borders duly polished. Refer Annexure - 1 for reference.
2	Backdrop of size 2100x450x750mm (wxdxh). Table made up of 19mm commercial board with 1mm laminate of standard and approved shade. Base made of 19mm commercial board with 1mm laminate of standard and approved shade. Teak moulding is provided at the borders duly polished. Refer Annexure - 2 for reference.
3	Steel Almirah of size 1980x910x480mm (hxwxd) having 4 adjustable shelves making 5 compartments without locker Fabrication: Almirah's side, back, top, bottom & shelves are made from mild steel of 22 gauge. The shelves shall have lipped flange 25mm width 15mm in depth. The shelves are fitted to rack strips made of mild steel sheets of 20 gauge thick with help of 4 brackets of 16 gauge that for support and adjustment and are having load bearing capacity of 90kg. uniformity divided load per shelf. The doors are made of mild steel sheet of 20 gauge and are having metal stiffener suitably spot welded to stiffen the door and fitted with the body with the help of but type hinges made of mild steel sheet of 18 gauge thickness double folded for free & smooth movement of doors. It is having bottom drawer. Refer Annexure - 3 for reference.
4	Wooden designer corner table of size 600x600x450mm (wxdxh) having frame made out of teak wood dult polished. Top made of 19mm commercial board with 4mm OST stright veneer ply pressed above it. Shelf provided at the bottom duly polished with malamine polish. Refer Annexure - 4 for refernece
5	Sofa fully upholstered three seater. Frame made of good quality seasoned assam teakwood duly anti termite treated. Seat : Good quality flat steel spring used in seat frame duly covered with coir, jute cloth and markeen fixed with 4" thick ISI mark pinhole rubber cushion .Back & Arm rest : Good quality flat steel spring covered with coir, juit cloth and markeen fixed with 2"thick ISI mark pinhole rubber and high density 'U' foam for giving shape in back and arm rest. Refer Annexure - 5 for refernece
6	Executive High Back Revolving Chair The seat height can be adjusted to contoured for comfortable seating. The U Foam seat of density 40 is scientifically designed for reduction in fatigue by offering an optimal seat depth to allow free leg movement. The cushioned armrests are made of teakwood duly melamine polished. The five pronged base is made of teakwood inserted MS frame for better stability and balance with castors made of first quality Nylon material and resist weight upto 150 Kgs.personalise the chairs with a gas lift that offers a cushioning effect. The U Foam backrest is specially contoured for comfortable seating. Refer Annexure - 6 for reference
7	Visitors Chair having crome frame and wooden arms.Refer Annexure- 7 for reference
	<u>Lab- 1 & 2 Refer Annexure - 8 for reference</u>
8a	Worktop of size 1800x900x25mm (wxdxt) made of 25mm prelaminted particle board with flat edges duly sealed with 2mm thick pvc edge banding tape. The worktop is supported with cantiliver brackets mad eof MS steel duly powder coated. Worksurface is also provided with ABS wire manager of 50mm dia.

8b	<p>Vertical modular partition panel laminated of 72mm thick and 1050mm ht. Basic structure is composed of rolled steel vertical and horizontal members to make the basic framework (skeletal) of partition. Partition has a cable raceways provided at the bottom as well as at any height in the partition as per the requirement. It has also facility to fix electrical switch / sockets as the openable plates. 12mm thick pre laminated particle board are used as snap on panels in the partition. Structure can be configured into any shape in 90 degree angle. All steel components are duly powder coated.</p> <p><u>Verticle Member</u></p> <p>Made of cold rolled square steel sections of 38mm sides and of 18 gauge at a maximum interval of 1200mm C/C both ways. All members shall have necessary dye-punches/cuts for mounting snap on double skinned 12mm, thick pre laminated particle board panels & accessories. Leveller screws duly fitted, if required. All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating 50 microns thick, performed at 200 degrees centigrade of scratch resistant finish.</p> <p><u>Horizontal Member</u></p> <p>Made of a combination of cold rolled square steel sections of 38mm sides and of 18-gauge, at a maximum interval of 1200mm C/C both ways, it shall have sharp C-sections of matching size and gauge to complete frame structure of required spans in conjunction with the vertical members, All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating 50 microns thick, performed at 200 degrees centigrade for scratch resistant finish.</p> <p><u>Cable Trays</u></p> <p>Made of cold rolled steel of 20-gauge. It shall be double walled, running mutually adjacent at the bottom of a partitions panels, mounted on hinges and having snap on covers to accommodate all wiring and cabling. Provision shall be made to take out wires and cable at various height from the basic frame structure.</p> <p>All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating, 50 microns thick, performed at 200 degrees centigrade for scratch resistant finish.</p> <p><u>Trim Cover</u></p> <p>Made of Aluminum of 16 gauge. The vertical and horizontal snap on cappings shall cover the joints and partition edges, so as to provide, continuity to the complete partitions system.</p> <p>1050x900x72mm (hwxwt) 1050x1200x72mm (hwxwt).</p>
8c	<p>Gable end in 18mm prelaminated particle board with flat edges duly sealed with 2mm thick pvc edge banding tape.</p>
9	<p>Drawers to keep Sheet having base made of 18mm prelaminated particle board duly edge banded with 18mm thick PLB shutters. Refer Annexure - 9 for refernece 900x450x1450mm</p>
10	<p>Storage having top made of 25mm prelaminated particle board with flat edges duly sealed with 2mm thick pvc edge banding tape. and base made of 18mm prelaminated particle board duly edge banded with 18mm thick PLB shutters. Refer Annexure - 10 for refernece 750x600x1450mm</p>
11	<p>Overhead unit body made of base made of 18mm prelaminated particle board duly edge banded with 18mm thick PLB shutters. Refer Annexure - 11 for reference. 600x330x900mm (wxdxh)</p>

12	Steel Almirah of size 1980x910x480mm (hxwxd) having 4 adjustable shelves making 5 compartments without locker Fabrication: Almirah's side, back, top, bottom & shelves are made from mild steel of 22 gauge. The shelves shall have lipped flange 25mm width 15mm in depth. The shelves are fitted to rack strips made of mild steel sheets of 20 gauge thick with help of 4 brackets of 16 gauge that for support and adjustment and are having load bearing capacity of 90kg. uniformity divided load per shelf. The doors are made of mild steel sheet of 20 gauge and are having metal stiffener suitably spot welded to stiffen the door and fitted with the body with the help of but type hinges made of mild steel sheet of 18 gauge thickness double folded for free & smooth movement of doors. It is having bottom drawer. Refer Annexure - 3 for reference.
13	Staff Chair having 12mm Ply and seat having 40 density U foam and option of fabric / lethrith on seat. The back is having net ,base in chrome and PP handle. Refer Annexure-12 for reference
	Lab (Store)
14	Steel Cabinet of size 78"x36"x19" (hxwxd) with four fixed shelves and transparent glass doors. Body will be of 0.8mm thick. The door shall be 1.25mm thick with transparent glass lock of 6 levers with stainless steel . Refer Annexure - 13 for reference.
15	Modular Workstation for 1 person Refer Annexure -14
15a	Worktop of size 1500x750x25mm (wxdxt) made of 25mm prelaminted particle board with flat edges duly sealed with 2mm thick pvc edge lipping. The worktop is with fitting. The worktop is supported with cantiliver brackets mad eof MS steel duly powder coated. Worksurface is also provided with ABS wire manager of 50mm dia.
15b	Side unit of size 900x450x750mm (wxdxh) having top made of 25mm prelaminted particle board with flat edges duly sealed with 2mm thick pvc edge banding tape. Base in 18mm prelaminted particle board duly edge banded.It has three drawer unit (2 single drawer & 1 filling drawer)
15c	Keyboard tray made of 25mm thickprelaminted particle board with 0.8mm thick laminate, duly edge banded with 2 mm thick tape. It shall move on smooth computer slides. All complete to the satisfaction of the Architect.
15d	Cpu trolley made of CRC duly powdercoated.
15e	Vertical modular partition panel laminated of 72mm thick and 1220mm ht. Basic structure is composed of rolled steel vertical and horizontal members to make the basic framework (skeletal) of partition. Partition has a cable raceways provided at the bottom as well as at any height in the partition as per the requirement. It has also facility to fix electrical switch / sockets as the openable plates.12mm thick pre laminated particle board are used as snap on panels in the partition. Structure can be configured into any shape in 90 degree angle. All steel components are duly powder coated.
	Verticle Member
	Made of cold rolled square steel sections of 38mm sides and of 18 gauge at a maximum interval of 1200mm C/C both ways. All members shall have necessary dye-punches/cuts for mounting snap on double skinned 12mm, thick pre laminated particle board panels & accessories. Leveller screws duly fitted, if required. All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating 50 microns thick, performed at 200 degrees centigrade of scratch resistant finish.
	Horizontal Member
	Made of a combination of cold rolled square steel sections of 38mm sides and of 18-gauge, at a maximum interval of 1200mm C/C both ways, it shall have sharp C-sections of matching size and gauge to complete frame structure of required spans in conjunction with the vertical members. All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating 50 microns thick, performed at 200 degrees centigrade for scratch resistant finish.

Cable Trays

Made of cold rolled steel of 20-gauge. It shall be double walled, running mutually adjacent at the bottom of a partitions panels, mounted on hinges and having snap on covers to accommodate all wiring and cabling. Provision shall be made to take out wires and cable at various height from the basic frame structure.

All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating, 50 microns thick, performed at 200 degrees centigrade for scratch resistant finish.

Trim Cover

Made of Aluminum of 16 gauge. The vertical and horizontal snap on cappings shall cover the joints and partition edges, so as to provide, continuity to the complete partitions system.

1220x900x72mm (hwxwt).

1220x750x72mm (hwxwt).

- 15f Gable end in 18mm prelaminated particle board with flat edges duly sealed with 2mm thick pvc edge banding tape.

ANNEXTURE-1



Table for Restoror Room

ANNEXTURE-2



Backdrop for Restoror Room

ANNEXTURE-3



Steel Almirah

ANNEXTURE-4



Side Table of size 600x600x450mm (wxdxh)

ANNEXTURE-5

Annex type -5



Sofa at Restoror Room

ANNEXTURE-6



Executive high Back Chair for Restoror room

ANNEXTURE-7

Annexure - 7



Visitor's Chair

ANNEXTURE-8



Workstation for Lab

ANNEXTURE-9



~14~



Drawers to keep sheet at Lab

ANNEXTURE-10



Low Ht Storage of ht 750mm

ANNEXTURE-11



Overhead unit of ht 900mm

ANNEXTURE-12



Staff Chair for Lab

ANNEXTURE-13



Steel Cabinet

ANNEXTURE-14



Staff Workstation

PRICE - Bid.

17

Sl. No.	Prescription	Qty.	Rate per unit	Total
1.	Designer Table of size 2100x900x750mm (wxdxh) with side unit of size 1200x450x750mm (wxdxh). Table made up of 19mm commercial board with 1mm laminate of standard and approved shade. Base made of 19mm commercial board with 1mm laminate of standard and approved shade. Teak moulding is provided at the borders duly polished. Refer Annexure - 1 for reference.	1		
2.	Backdrop of size 2100x450x750mm (wxdxh). Table made up of 19mm commercial board with 1mm laminate of standard and approved shade. Base made of 19mm commercial board with 1mm laminate of standard and approved shade. Teak moulding is provided at the borders duly polished. Refer Annexure - 2 for reference.	1		
3.	Steel Almirah of size 1980x910x480mm (hxwxd) having 4 adjustable shelves making 5 compartments without locker Fabrication: Almirah's side, back, top, bottom & shelves are made from mild steel of 22 gauge. The shelves shall have lipped flange 25mm width 15mm in depth. The shelves are fitted to rack strips made of mild steel sheets of 20 gauge thick with help of 4 brackets of 16 gauge that for support and adjustment and are having load bearing capacity of 90kg. uniformity divided load per shelf. The doors are made of mild steel sheet of 20 gauge and are having metal stiffener suitably spot welded to stiffen the door and fitted with the body with the help of but type hinges made of mild steel sheet of 18 gauge thickness double folded for free & smooth movement of doors. It is having bottom drawer. Refer Annexure - 3 for reference.	2		
4.	Wooden designer corner table of size 600x600x450mm (wxdxh) having frame made out of teak wood duly polished. Top made of 19mm commercial board with 4mm OST straight veneer ply pressed above it. Shelf provided at the bottom duly polished with malamine polish. Refer Annexure - 4 for reference	1		
5.	Sofa fully upholstered three seater. Frame made of good quality seasoned assam teakwood duly anti termite treated. Seat : Good quality flat steel spring used in seat frame duly covered with coir, jute cloth and markeen fixed with 4" thick ISI mark pinhole rubber cushion. Back & Arm rest : Good quality flat steel spring covered with coir, jute cloth and markeen fixed with 2" thick ISI mark pinhole rubber and high density 'U' foam for giving shape in back and arm rest. Refer Annexure - 5 for reference	1		
6.	Executive High Back Revolving Chair The seat height can be adjusted to contoured for comfortable seating. The U Foam seat of density 40 is scientifically designed for reduction in fatigue by offering an optimal seat depth to allow free leg movement. The cushioned armrests are made of teakwood duly melamine polished. The five pronged base is made of teakwood inserted MS frame for better stability and balance with castors made of first quality Nylon material and resist weight upto 150 Kgs. personalise the chairs with a gas lift that offers a cushioning effect. The U Foam backrest is specially contoured for comfortable seating. Refer Annexure - 6 for reference	1		
7.	Visitors Chair having chrome frame and wooden arms. Refer Annexure- 7 for reference	3		
	Lab- 1 & 2 Refer Annexure - 8 for reference			
8 a	Worktop of size 1800x900x25mm (wxdxt) made of 25mm prelaminted particle board with flat edges duly sealed with 2mm thick	7		

	pvc edge banding tape. The worktop is supported with cantiliver brackets mad eof MS steel duly powder coated. Worksurface is also provided with ABS wire manager of 50mm dia.			
8 b	Vertical modular partition panel laminated of 72mm thick and 1050mm ht. Basic structure is composed of rolled steel vertical and horizontal members to make the basic framework (skeletal) of partition. Partition has a cable raceways provided at the bottom as well as at any height in the partition as per the requirement. It has also facility to fix electrical switch / sockets as the openable plates.12mm thick pre laminated particle board are used as snap on panels in the partition. Structure can be configured into any shape in 90 degree angle. All steel components are duly powder coated.			
	Verticle Member			
	Made of cold rolled square steel sections of 38mm sides and of 18 gauge at a maximum interval of 1200mm C/C both ways. All members shall have necessary dye-punches/cuts for mounting snap on double skinned 12mm, thick pre laminated particle board panels & accessories. Leveller screws duly fitted, if required. All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating 50 microns thick, performed at 200 degrees centigrade of scratch resistant finish.			
	Horizontal Member			
	Made of a combination of cold rolled square steel sections of 38mm sides and of 18-gauge, at a maximum interval of 1200mm C/C both ways, it shall have sharp C-sections of matching size and gauge to complete frame structure of required spans in conjunction with the vertical members, All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating 50 microns thick, performed at 200 degrees centigrade for scratch resistant finish.			
	Cable Trays			
	Made of cold rolled steel of 20-gauge. It shall be double walled, running mutually adjacent at the bottom of a partitions panels, mounted on hinges and having snap on covers to accommodate all wiring and cabling. Provision shall be made to take out wires and cable at various height from the basic frame structure.			
	All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating, 50 microns thick, performed at 200 degrees centigrade for scratch resistant finish.			
	Trim Cover			
	Made of Aluminum of 16 gauge. The vertical and horizontal snap on cappings shall cover the joints and partition edges, so as to provide, continuity to the complete partitions system.			
	1050x900x72mm (hwxwt)	22		
	1050x1200x72mm (hwxwt).	4		
8 c	Gable end in 18mm prelaminated particle board with flat edges duly sealed with 2mm thick pvc edge banding tape.	20		
9	Drawers to keep Sheet having base made of 18mm prelaminated particle board duly edge banded with 18mm thick PLB shutters.Refer Annexure - 9 for refernece			
	900x450x1450mm	4		
10	Storage having top made of 25mm prelaminated particle board with flat edges duly sealed with 2mm thick pvc edge banding tape. and base made of 18mm prelaminated particle board duly edge banded with 18mm thick PLB shutters.Refer Annexure - 10 for refernece			

	750x600x1450mm	4		
11	Overhead unit body made of base made of 18mm prelaminated particle board duly edge banded with 18mm thick PLB shutters. Refer Annexure - 11 for reference.			
	600x330x900mm (wxdxh)	7		
12	Steel Almirah of size 1980x910x480mm (hxwxd) having 4 adjustable shelves making 5 compartments without locker Fabrication: Almirah's side, back, top, bottom & shelves are made from mild steel of 22 gauge. The shelves shall have lipped flange 25mm width 15mm in depth. The shelves are fitted to rack strips made of mild steel sheets of 20 gauge thick with help of 4 brackets of 16 gauge that for support and adjustment and are having load bearing capacity of 90kg. uniformity divided load per shelf. The doors are made of mild steel sheet of 20 gauge and are having metal stiffener suitably spot welded to stiffen the door and fitted with the body with the help of but type hinges made of mild steel sheet of 18 gauge thickness double folded for free & smooth movement of doors. It is having bottom drawer. Refer Annexure - 3 for reference.	5		
13	Staff Chair having 12mm Ply and seat having 40 density U foam and option of fabric / lethrith on seat. The back is having net, base in chrome and PP handle. Refer Annexure-12 for reference	12		
	Lab (Store)			
14	Steel Cabinet of size 78"x36"x19" (hxwxd) with four fixed shelves and transparent glass doors. Body will be of 0.8mm thick. The door shall be 1.25mm thick with transparent glass lock of 6 levers with stainless steel. Refer Annexure - 13 for reference.	5		
15	Modular Workstation for 1 person Refer Annexure -14			
15 a	Worktop of size 1500x750x25mm (wxdxt) made of 25mm prelaminted particle board with flat edges duly sealed with 2mm thick pvc edge lipping. The worktop is with fitting. The worktop is supported with cantiliver brackets mad eof MS steel duly powder coated. Worksurface is also provided with ABS wire manager of 50mm dia.	1		
15 b	Side unit of size 900x450x750mm (wxdxh) having top made of 25mm prelaminted particle board with flat edges duly sealed with 2mm thick pvc edge banding tape. Base in 18mm prelaminted particle board duly edge banded. It has three drawer unit (2 single drawer & 1 filling drawer)	1		
15 c	Keyboard tray made of 25mm thick prelaminted particle board with 0.8mm thick laminate, duly edge banded with 2 mm thick tape. It shall move on smooth computer slides. All complete to the satisfaction of the Architect.	1		
15 d	Cpu trolley made of CRC duly powdercoated.	1		
15 e	Vertical modular partition panel laminated of 72mm thick and 1220mm ht. Basic structure is composed of rolled steel vertical and horizontal members to make the basic framework (skeletal) of partition. Partition has a cable raceways provided at the bottom as well as at any height in the partition as per the requirement. It has also facility to fix electrical switch / sockets as the openable plates. 12mm thick pre laminated particle board are used as snap on panels in the partition. Structure can be configured into any shape in 90 degree angle. All steel components are duly powder coated.			
	Verticle Member			
	Made of cold rolled square steel sections of 38mm sides and of 18 gauge at a maximum interval of 1200mm C/C both ways. All			

	members shall have necessary dye-punches/cuts for mounting snap on double skinned 12mm, thick pre laminated particle board panels & accessories. Leveller screws duly fitted, if required. All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating 50 microns thick, performed at 200 degrees centigrade of scratch resistant finish.			
	Horizontal Member			
	Made of a combination of cold rolled square steel sections of 38mm sides and of 18-gauge, at a maximum interval of 1200mm C/C both ways, it shall have sharp C-sections of matching size and gauge to complete frame structure of required spans in conjunction with the vertical members. All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating 50 microns thick, performed at 200 degrees centigrade for scratch resistant finish.			
	Cable Trays			
	Made of cold rolled steel of 20-gauge. It shall be double walled, running mutually adjacent at the bottom of a partitions panels, mounted on hinges and having snap on covers to accommodate all wiring and cabling. Provision shall be made to take out wires and cable at various height from the basic frame structure.			
	All steel components shall be treated for anti rust, 9 tank phosphating treatment followed by epoxy polyester powder coating, 50 microns thick, performed at 200 degrees centigrade for scratch resistant finish.			
	Trim Cover			
	Made of Aluminum of 16 gauge. The vertical and horizontal snap on cappings shall cover the joints and partition edges, so as to provide, continuity to the complete partitions system.			
	1220x900x72mm (hxwxt).	1		
	1220x750x72mm (hxwxt).	1		
15 f	Gable end in 18mm prelaminted particle board with flat edges duly sealed with 2mm thick pvc edge banding tape.	1		

Installation Charges :-

Service Tax :-

VAT :-

Installation Charges if any Service Tax and VAT mentioned separately.